
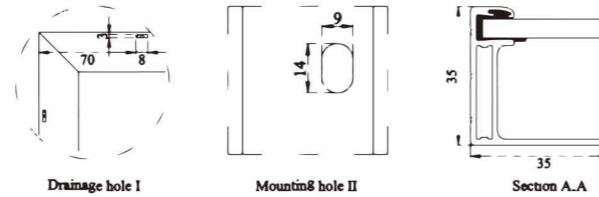




# SS60<sup>5BB</sup>

## 260W-275W

Poly crystalline PV Module

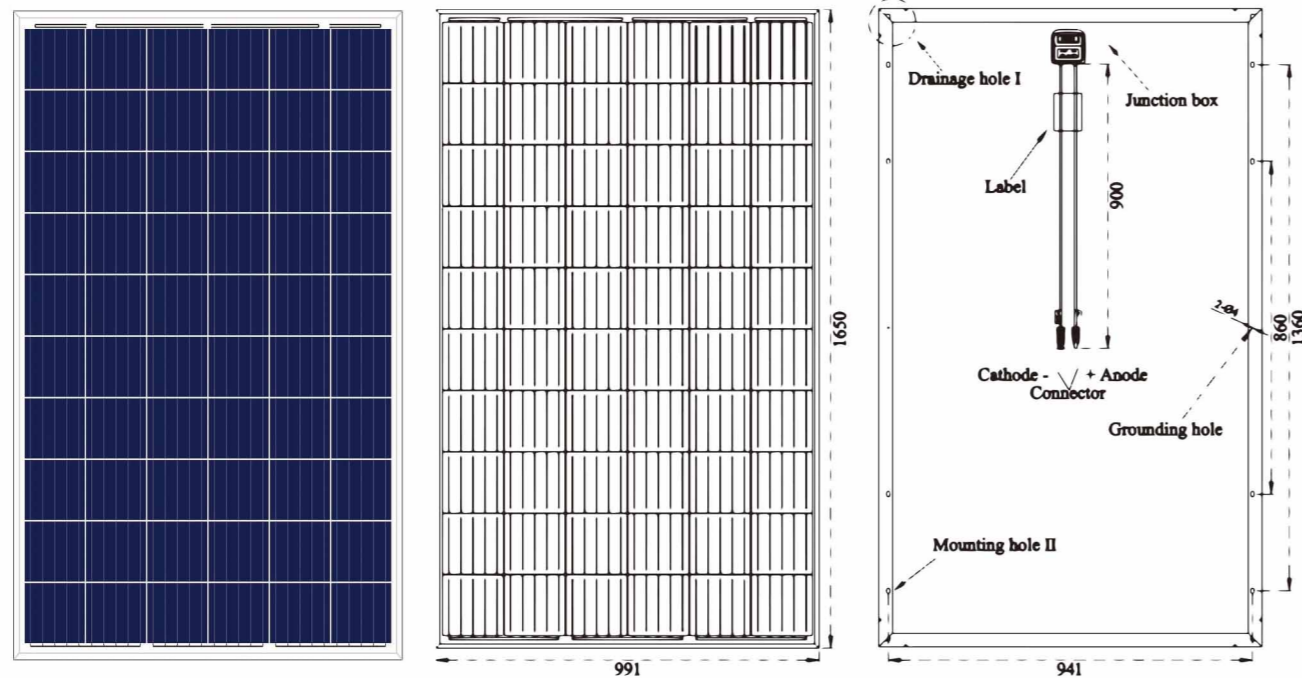

## parameter

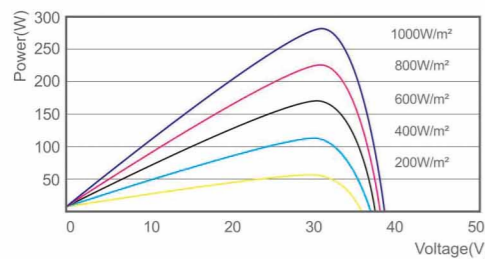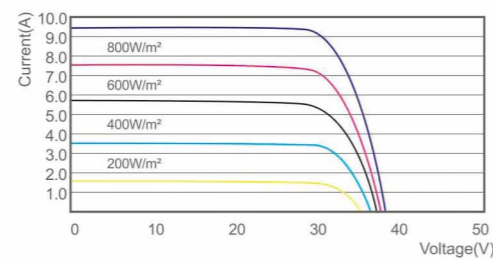**PV Curve (275W)**

**IV Curve (275W)**


### Mechanical Specification

Cells Type	Poly156.75×156.75mm		
Weight	18.8kg		
Dimension (L×W×T)	1650×991×35mm		
Output Cables	TUV, Length900mm, 4.0mm <sup>2</sup>		
No.of Cells	60 (6×10)		
Front Glass	3.2mm High Transmission,Low Iron Tempered Glass		
Frame	Anodised Aluminium		
Junction box	IP67, 3 Bypass Diodes		
Connector	MC4 or MC4 Compactible		

### Packing Configuration

Container	20GP	40GP	40HC
PCS per pallet	30	30	30
PLT per container	14	28	28
PCS per container	400	840	924

### Operating Parameters

Maximum system voltage	DC1000V
Operating Temperature(°C)	-40 ~ +85°C
Maximum series fuse rating	15A
Snow load,frontside	5400Pa
Wind load, backside	2400Pa
Nominal operating cell temperature (NOCT)	45°C±2°C
Application level	Class A

### Electrical Characteristics (Standard Test Conditions)

Module Type	SS60-260	SS60-265	SS60-270	SS60-275
Maximum Power(Pmax)	260W	265W	270W	275W
Open-circuit Voltage (Voc)	38.1V	38.3V	37.9V	38.5V
Maximum Power Voltage (Vmp)	30.6V	30.8V	30.9V	31.1V
Short-circuit Current (Isc)	9.01A	9.10A	9.22A	9.25A
Maximum Power Current(Imp)	8.50A	8.61A	8.73A	8.84A
Module Efficiency(%)	15.90%	16.21%	16.51%	16.82%
Power Tolerance	0 ~ +5W			
Temperature Coefficient of Isc	0.05%/°C			
Temperature Coefficient of Voc	-0.32%/°C			
Temperature Coefficient of Pmax	-0.41%/°C			
Standard Test Environment	Irradiance 1000w/m <sup>2</sup> , Cell temperature 25°C, Spectrum AM1.5			



### Electrical Characteristics (Noct)

Module Type	SS60-260	SS60-265	SS60-270	SS60-275
Maximum Power(Pmax))	194W	197W	200W	204W
Open-circuit Voltage (Voc)	35.4V	35.5V	35.6V	35.7V
Maximum Power Voltage (Vmp)	28.5V	28.6V	28.7V	28.9V
Short-circuit Current (Isc)	7.29A	7.35A	7.41A	7.47A
Maximum Power Current(Imp)	6.81A	6.89A	6.97A	7.06A
Standard Test Environment	Irradiance 800w/m <sup>2</sup> , Cell temperature 20°C, Spectrum AM1.5, Wind speed 1m/s			



# SS72 <sup>5BB</sup>

## 315W-330W

Poly crystalline PV Module

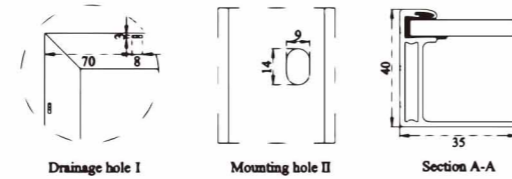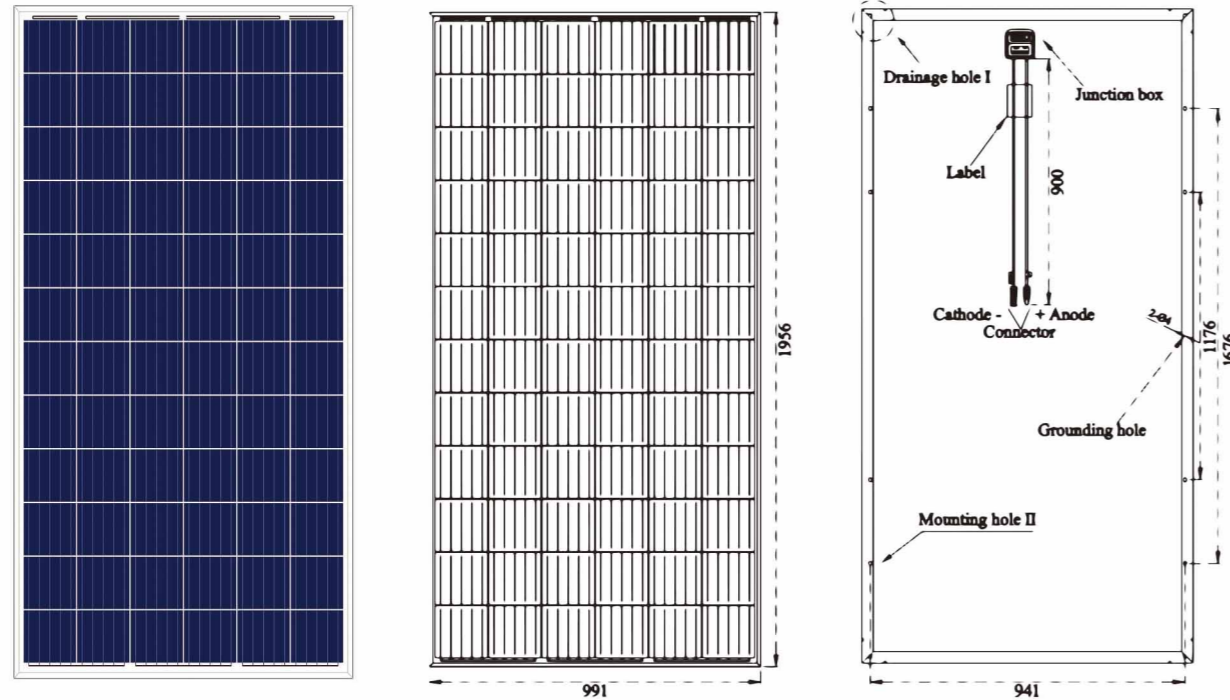

## parameter

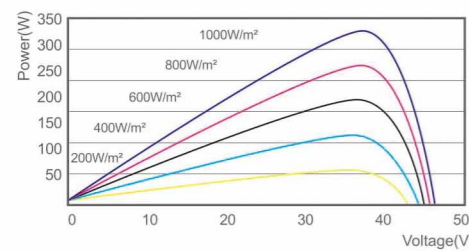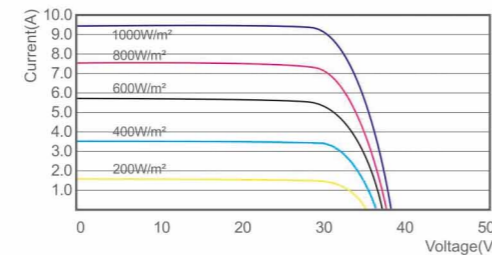**PV Curve (330W)**

**IV Curve (330W)**


### Mechanical Specification

Cells Type	Poly156.75×156.75mm		
Weight	22.5kg		
Dimension (L×W×T)	1956×991×40mm		
Output Cables	TUV, Length900mm, 4.0mm <sup>2</sup>		
No.of Cells	72 (6×12)		
Front Glass	3.2mm High Transmission,Low Iron Tempered Glass		
Frame	Anodised Aluminium		
Junction box	IP67, 3 Bypass Diodes		
Connector	MC4 or MC4 Compactible		

### Packing Configuration

Container	20GP	40GP	40HC
PCS per pallet	27	27	27
PLT per container	10	24	24
PCS per container	270	648	696

### Operating Parameters

Maximum system voltage	DC1000V
Operating Temperature(°C)	-40 ~ +85°C
Maximum series fuse rating	15A
Snow load,frontside	5400Pa
Wind load, backside	2400Pa
Nominal operating cell temperature (NOCT)	45°C±2°C
Application level	Class A

### Electrical Characteristics (Standard Test Conditions)

Module Type	SS72-315	SS72-320	SS72-325	SS72-330
Maximum Power(Pmax)	315W	320W	325W	330W
Open-circuit Voltage (Voc)	45.6V	45.8V	45.9V	46.1V
Maximum Power Voltage (Vmp)	36.9V	37.1V	37.2V	37.3V
Short-circuit Current (Isc)	9.00A	9.10A	9.25A	9.38A
Maximum Power Current(Imp)	8.54A	8.63A	8.76A	8.85A
Module Efficiency(%)	16.25%	16.51%	16.77%	17.02%
Power Tolerance	0~+5W			
Temperature Coefficient of Isc	0.05%/°C			
Temperature Coefficient of Voc	-0.32%/°C			
Temperature Coefficient of Pmax	-0.41%/°C			
Standard Test Environment	Irradiance 1000w/m <sup>2</sup> , Cell temperature 25°C, Spectrum AM1.5			

### Electrical Characteristics (Noct)

Module Type	SS72-315	SS72-320	SS72-325	SS72-330
Maximum Power(Pmax))	234W	238W	242W	246W
Open-circuit Voltage (Voc)	42.4V	42.5V	42.6V	42.7V
Maximum Power Voltage (Vmp)	34.3V	34.4V	34.5V	34.6V
Short-circuit Current (Isc)	7.25A	7.35A	7.47A	7.57A
Maximum Power Current(Imp)	6.82A	6.92A	7.02A	7.11A
Standard Test Environment	Irradiance 800w/m <sup>2</sup> , Cell temperature 20°C, Spectrum AM1.5, Wind speed 1m/s			